

# KELVA Pumps

Liquid Flow - LF15, LF30, LF60, LF120



## Improved Quality

– With Kelva's LF-Pump - The Economic Solution

- Less pulsation (-70%)
- Lower air consumption (-30-50%) and maintenance costs
- Longer diaphragm lifetime - less downtime
- Built-in sound muffler
- ATEX approved

Kelva LF Pump has a revolutionising air valve design and central flow technique. It has compact design and has total flexibility in installation. The Kelva LF, thanks to the central flow, the more efficient air motor, new flap valve design and flexible diaphragm suspension heavily reduces both pulsation and noise.




[WWW.KELVA.SE](http://WWW.KELVA.SE)

Product name	Kelva Liquid Flow Pump (LF)
Types	LF15, LF30, LF60 or LF120*
Application	Ink, glue, solvents, resin, paint, wood preservatives, varnish, stain, latex, acetone, turpentine, acids, alkalies, suspensions, stabilisers, resins, waste recovery, caustic soda, dispersions
Max air pressure	Max 6 Bar

\* number stands for liters/min

### DIMENSIONS

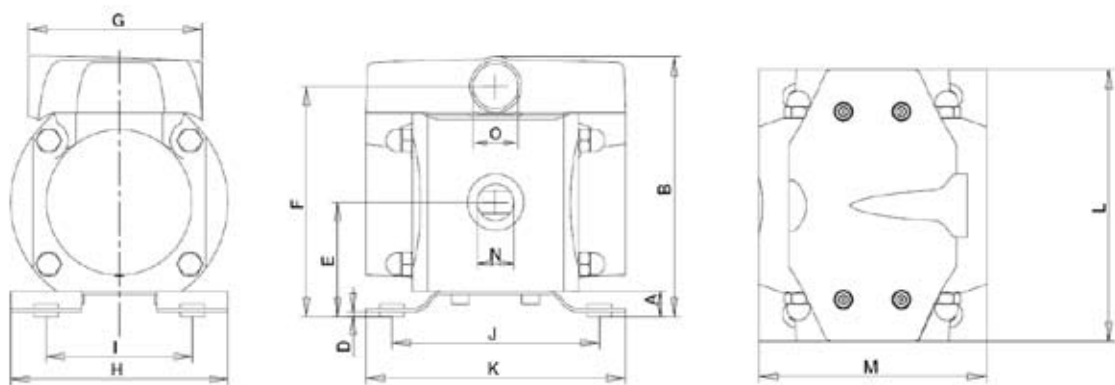

Pump Type	B	I	J	L	M	N
LF15	145	101	118	147	123	1/4"
LF30	145	101	118	147	123	1/2"
LF60	164	101	118	147	141	3/4"
LF120	210	134	148,5	170	184	1 1/4"

### Capacity normal LF

